


Foundation Kit - II

OWNER'S MANUAL / Instructions for Assembly Size 8 Ft x 6 Ft / 2.4 m x 1.8 m (Approx.)

Ver : 0.0




ISO 9001:2008

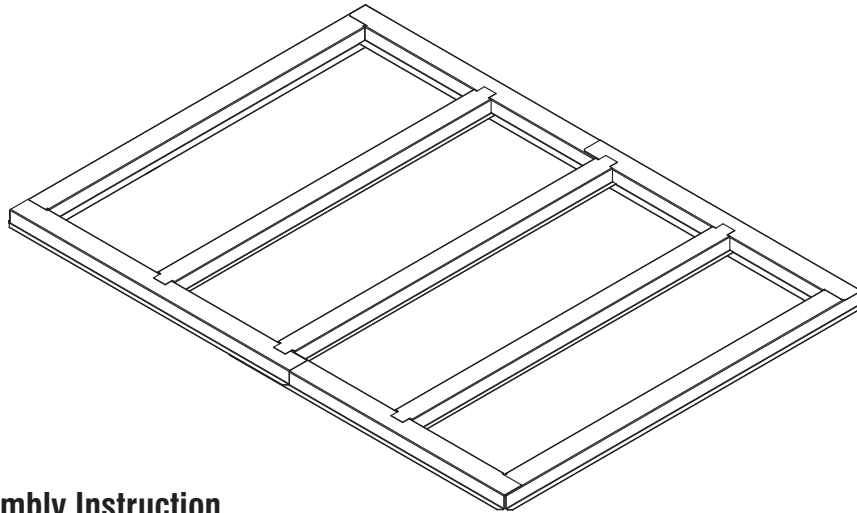

PART-1

8 Ft x 6 Ft Foundation Assembly Instruction

Note : Follow Part 1 only for 8 Ft x 6 Ft Foundation Assembly

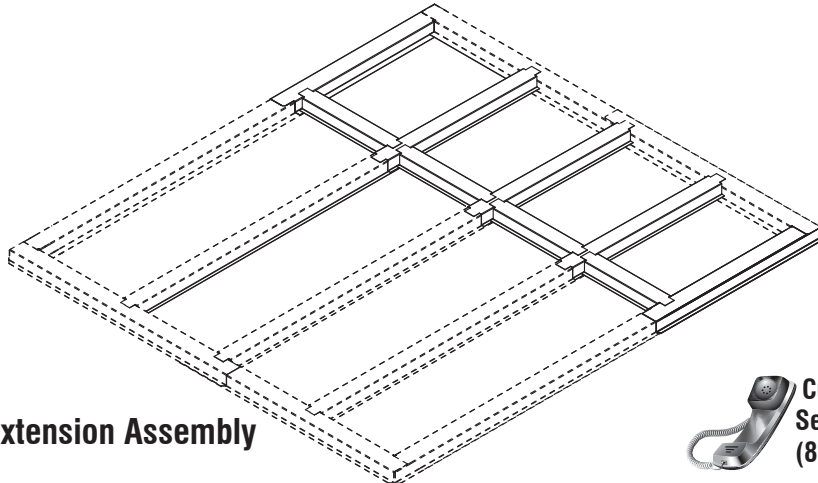

PART-2

8 Ft x 6 Ft Foundation With One Extension Assembly Instruction

Note : Follow Part 2 only for 8 Ft x 6 Ft Foundation With Additional Extensions Assembly




**Customer
Service Hotline
(800) 483-4674**




www.duramaxbp.com

Call us for any missing or damaged parts.
Do not return to the store.


TOOLS YOU WILL NEED



Cordless Drill - Philips Head




Rubber mallet




Hand Gloves



Goggles





Carpenters Square



Level - 3ft.

PART - 1 : 8 Ft x 6 Ft Foundation Assembly

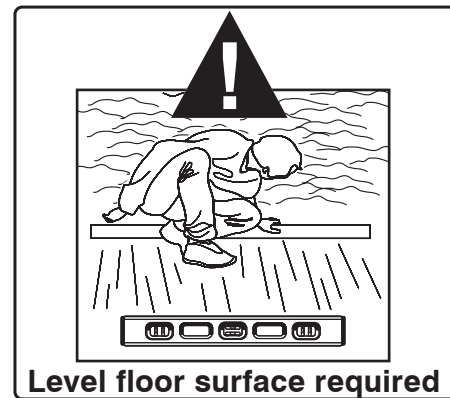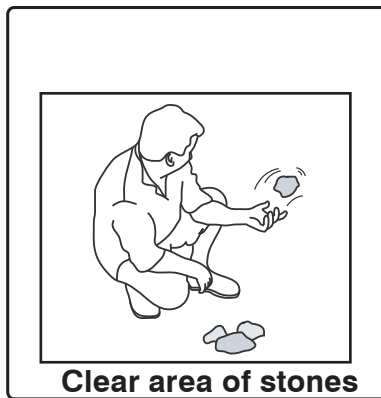

Parts List

Note: Check all parts prior to installation.

PARTS NEEDED FOR BASIC	
CODE	QTY
F10B	2
F11B	2
F12B	2
F13B	3


ACCESSORIES FOR BASIC	
CODE	QTY
S1	14

Note



1. It is important that these instructions are followed step by step.
2. Set the torque limit of your screw drill to #3 or #4 to ensure the screws do not strip the metal profiles.

1



F10B (x2)
F11B (x2)




S1 (x4)

Note



Make 2 Sets.

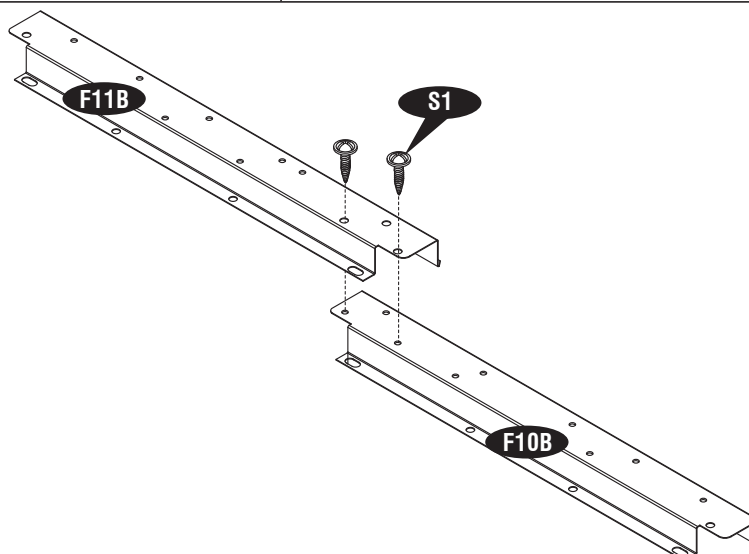

2

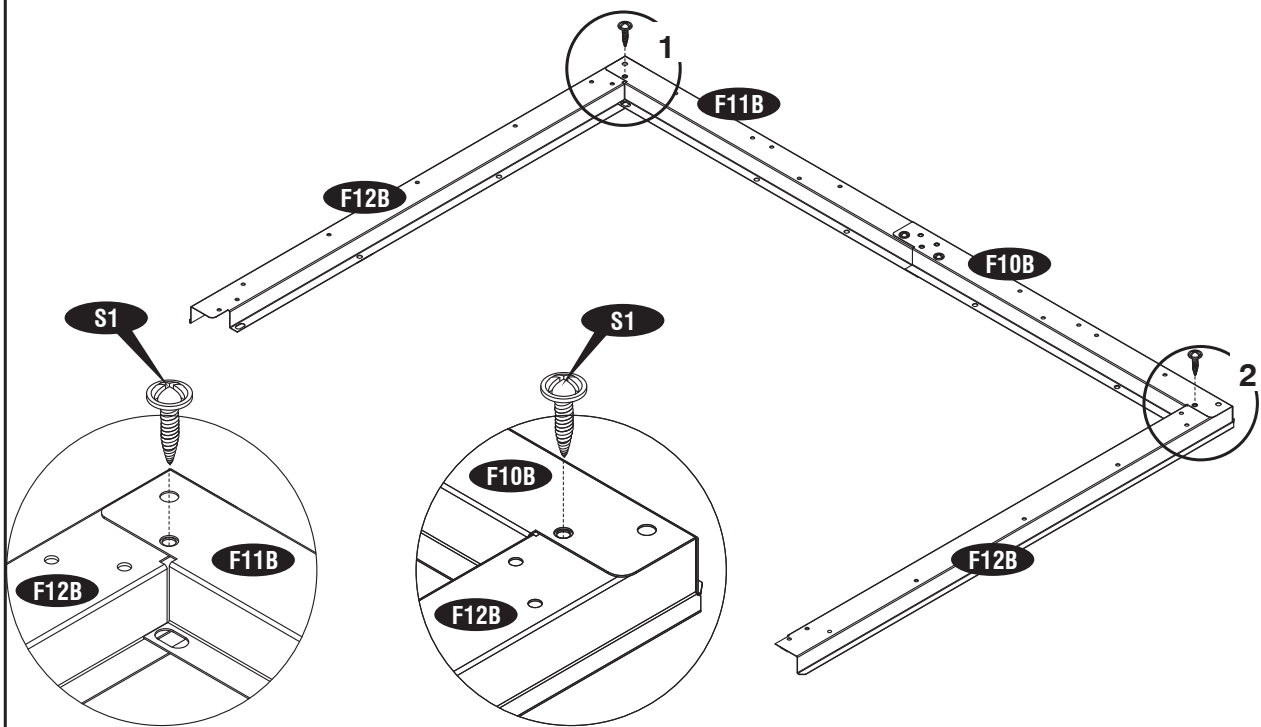


Fig.1

Fig.2

3


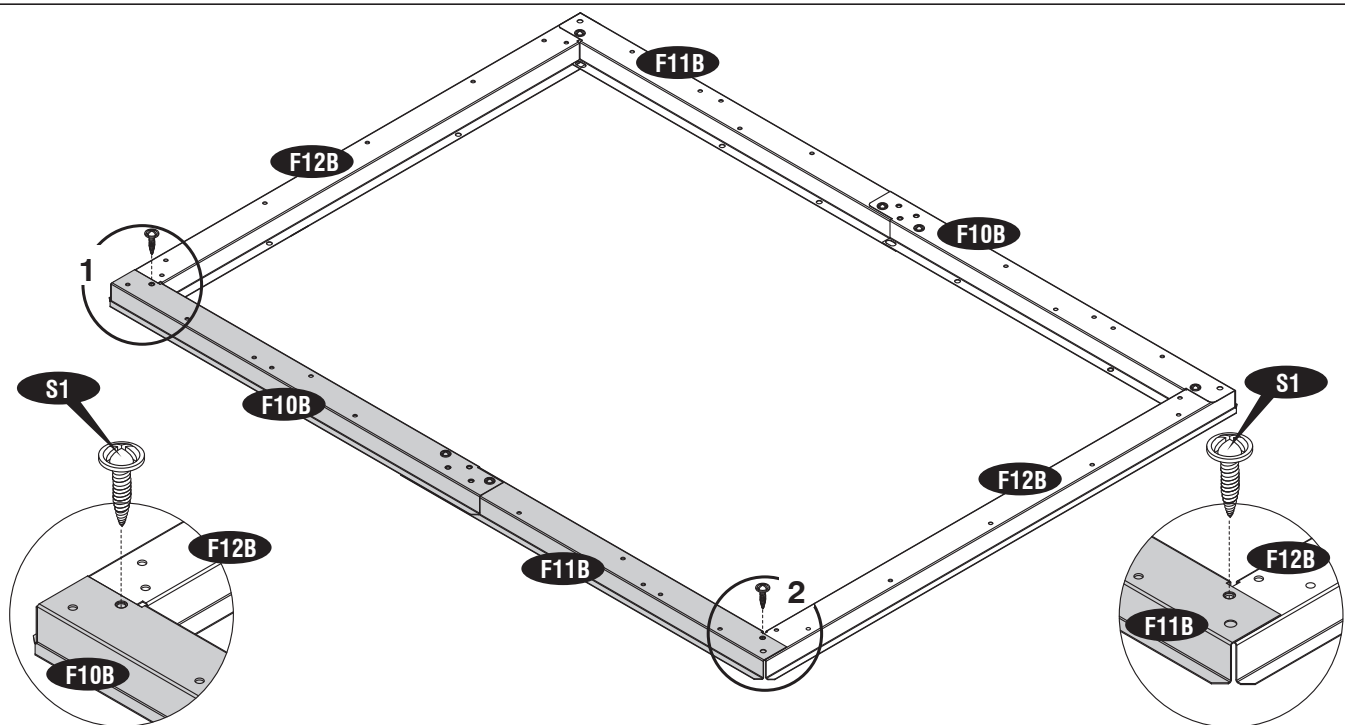


Fig.1


Fig.2

4


F13B (x3)



S1 (x6)

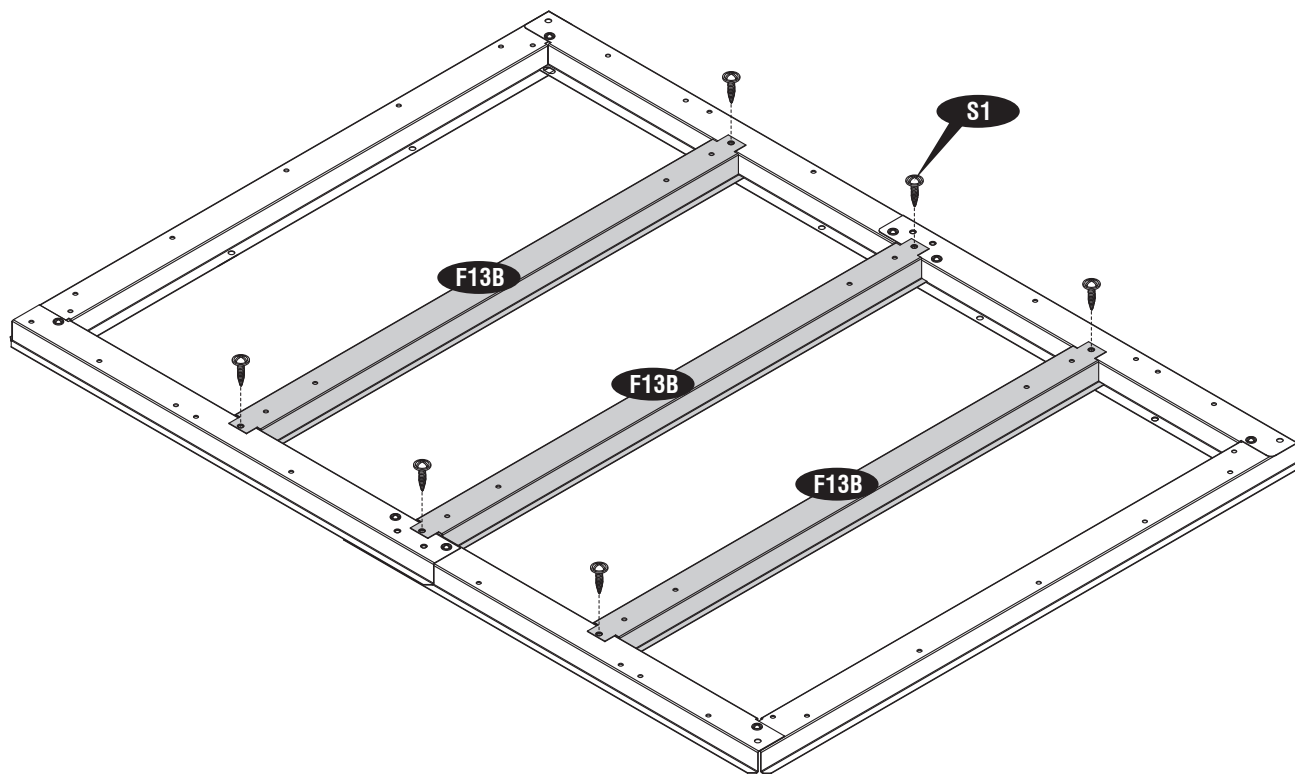

5

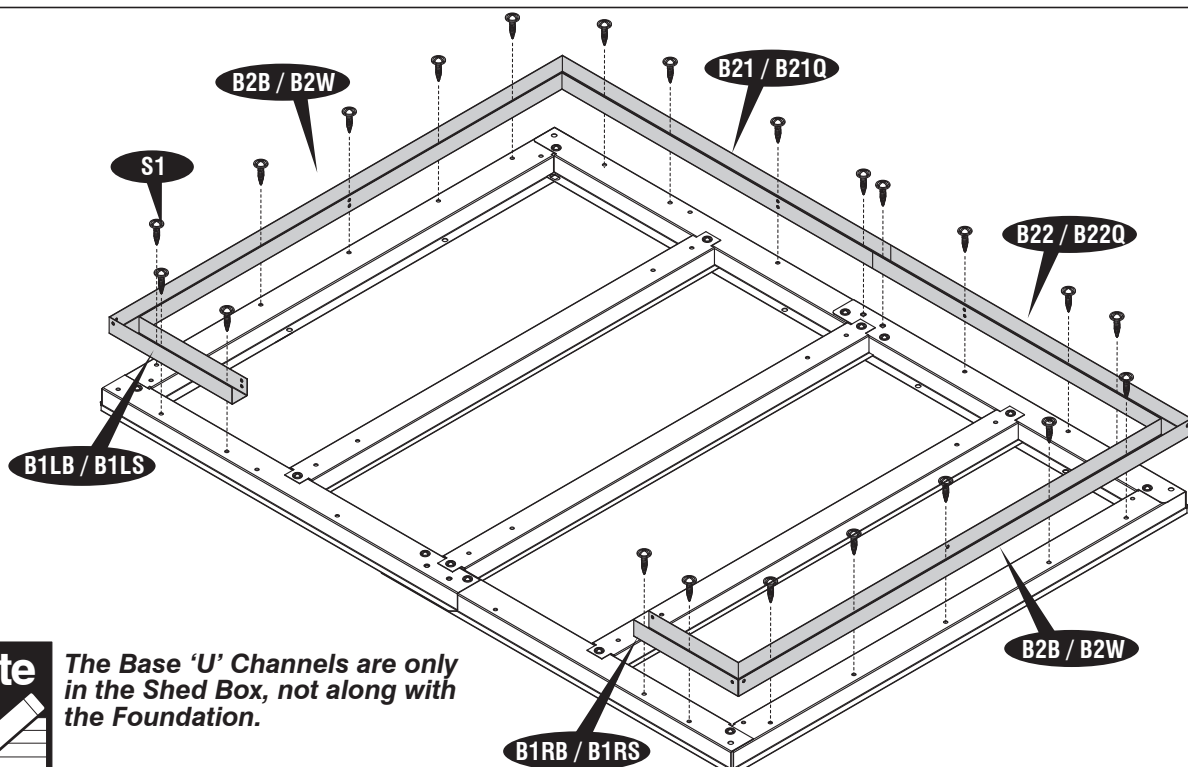

Note


The Base 'U' Channels are only in the Shed Box, not along with the Foundation.

3


Parts needed (not included) :

DESCRIPTION	QTY
Dia. 4.2 x 32mm. (5/32" x 1 1/4")	
Self tapping screw	16
Dia 6 mm Wall plug	16

After completing the assembly of shed, mark the holes on concrete through the foundation frame and using Dia. 6mm. drill bit to make the holes. Secure with **Dia 6mm Wall Plug** and **Dia 4.2 x 32mm self tapping screw** (not provided). This is optional and should be done for wind area if needed.

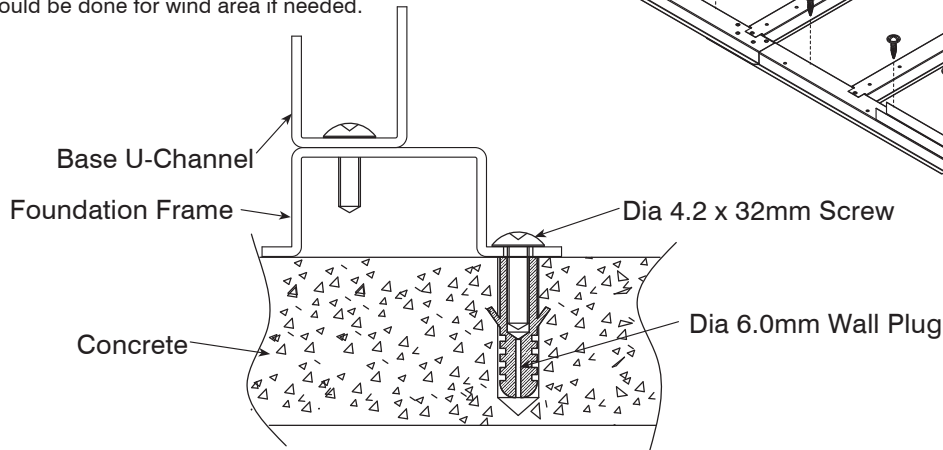


After completing the assembly of shed place exterior grade CDX 3/4" (19 mm) plywood inside the foundation.

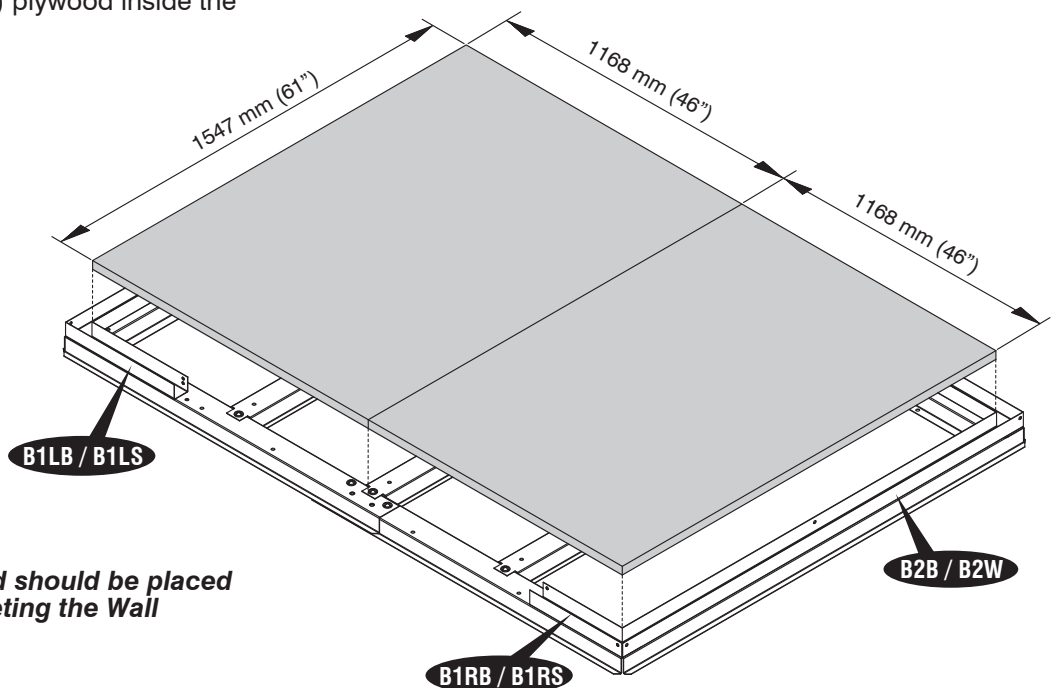**Note**

The Plywood should be placed after completing the Wall Assembly.

After completing the assembly of the base U-Channel fill the concrete up to the foundation top surface.

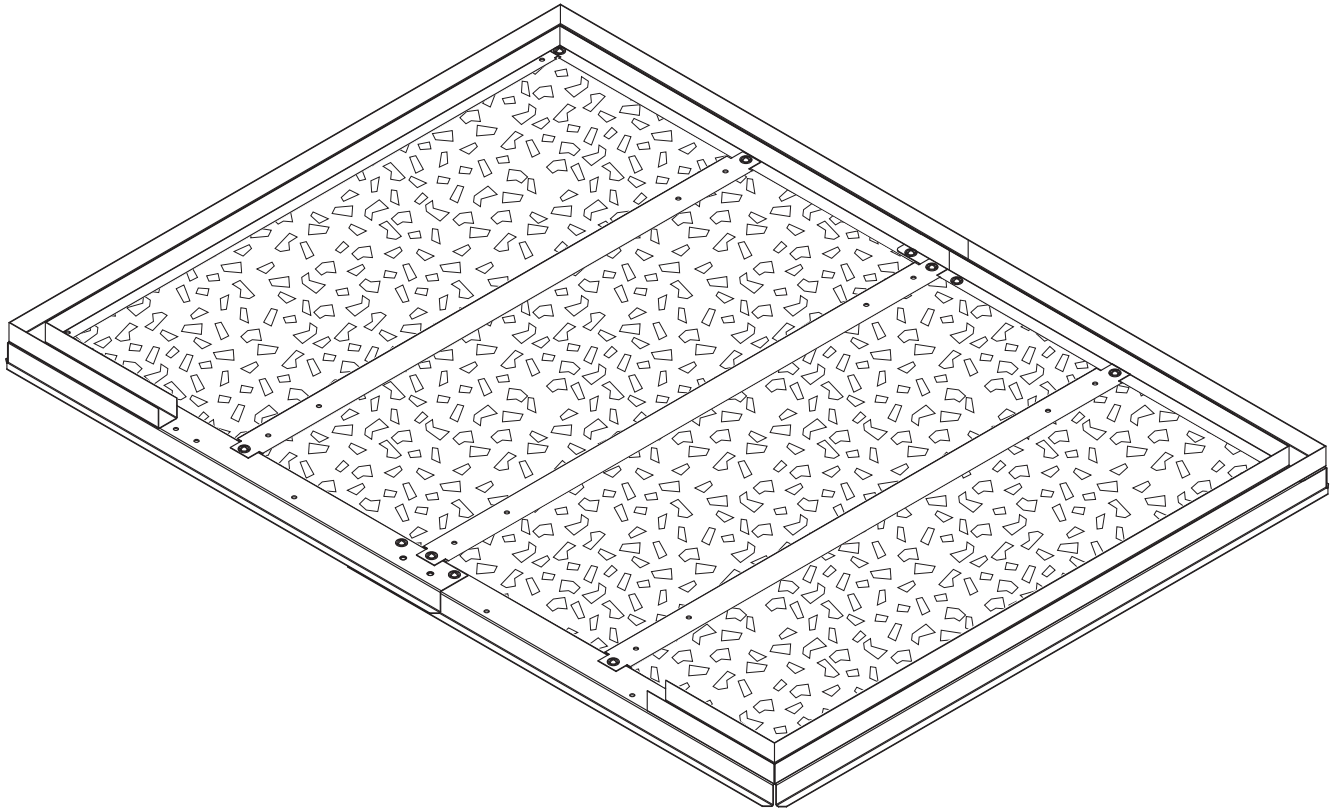

PART - 2 : 8 Ft x 6 Ft Foundation Assembly With One Extension



Parts List

Note: Check all parts prior to installation.

PARTS NEEDED FOR BASIC	
CODE	QTY
F10B	2
F11B	2
F12B	2
F13B	3

ACCESSORIES FOR BASIC	
CODE	QTY
S1	14

PARTS NEEDED FOR EXTENSION	
CODE	QTY
F10	1
F11	1
F12	3
F14	4


ACCESSORIES FOR EXTENSION	
CODE	QTY
S1	16

Note



1. It is important that these instructions are followed step by step.
2. Set the torque limit of your screw drill to #3 or #4 to ensure the screws do not strip the metal profiles.

1



F10B (x2)
F11B (x2)




S1 (x4)

Note




Make 2 Sets.

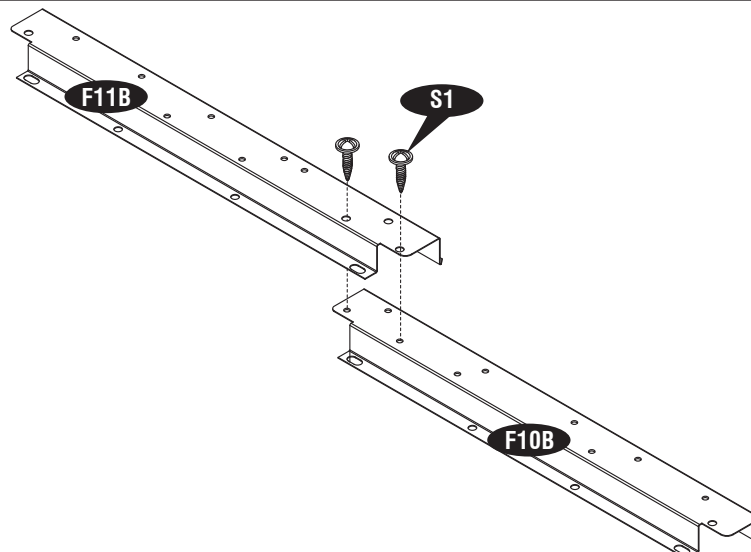


2


F12B (x1)
F10 (x1)

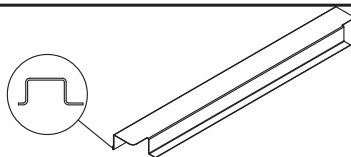

S1 (x1)




Note For additional each extension,
add one F10.

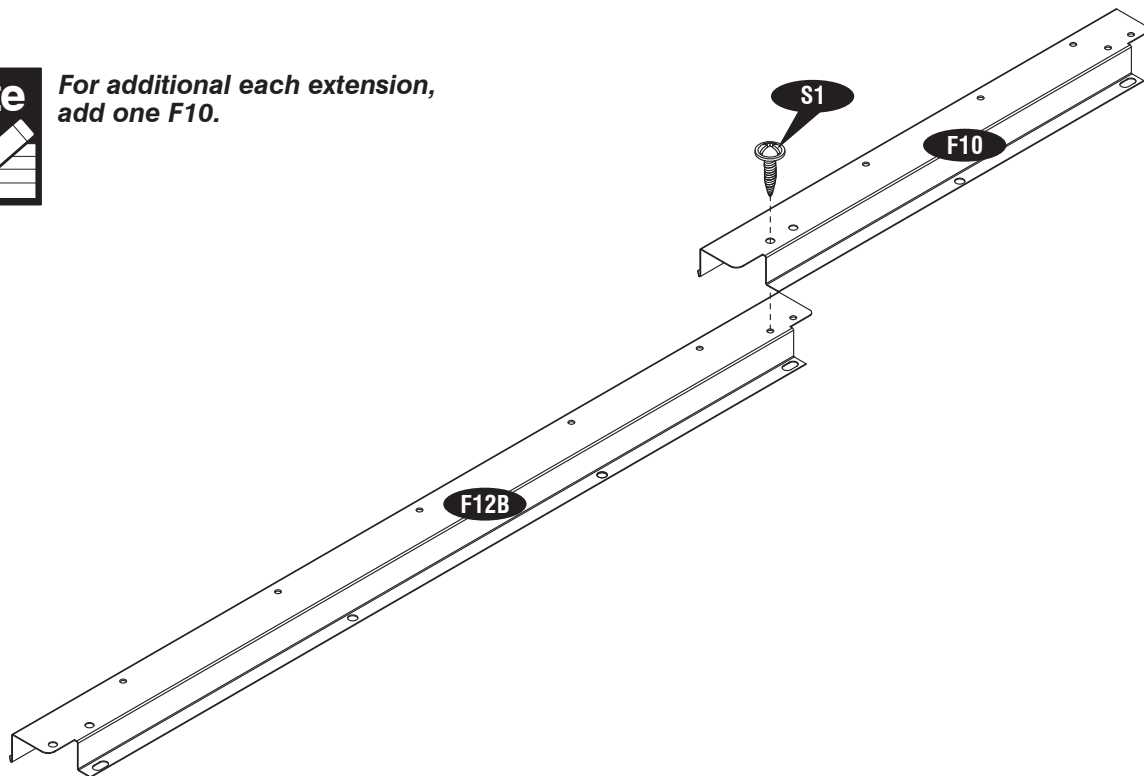


3


F12B (x1)
F11 (x1)

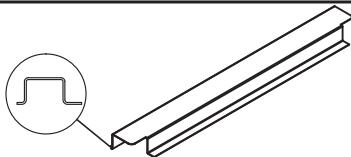

S1 (x1)




Note For additional each extension,
add one F11.

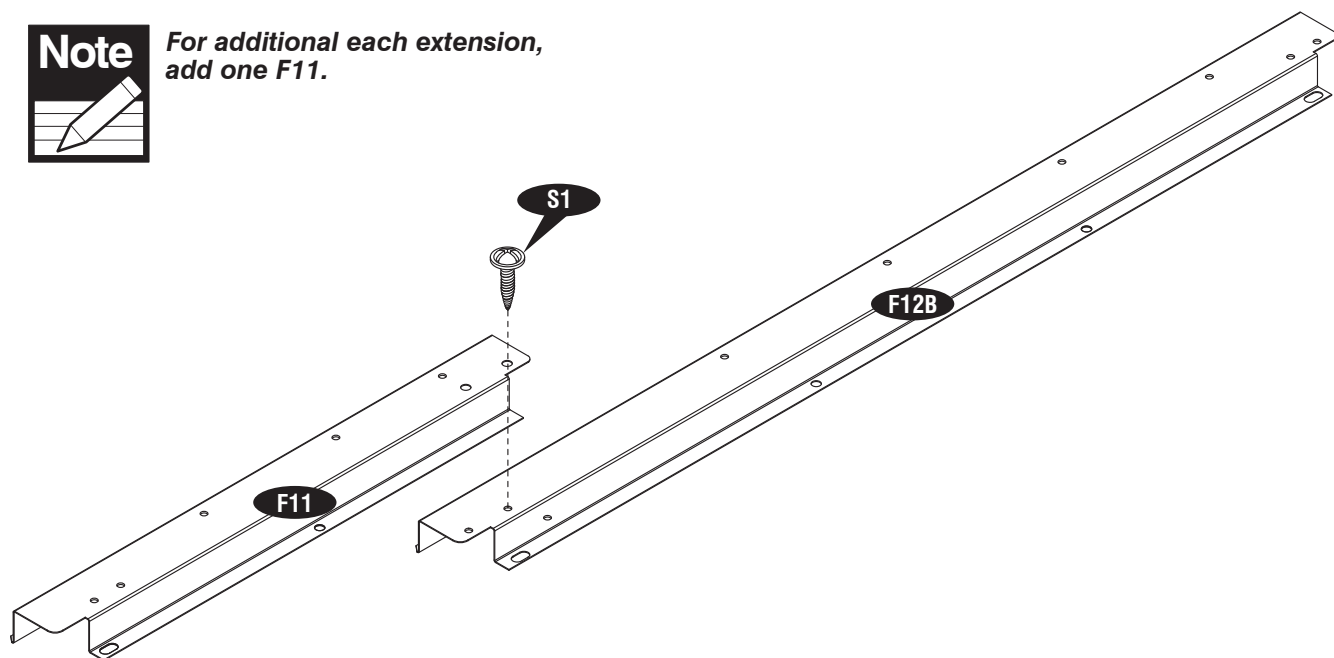


4

F13B (x8)

F12 (x4)



S1 (x8)

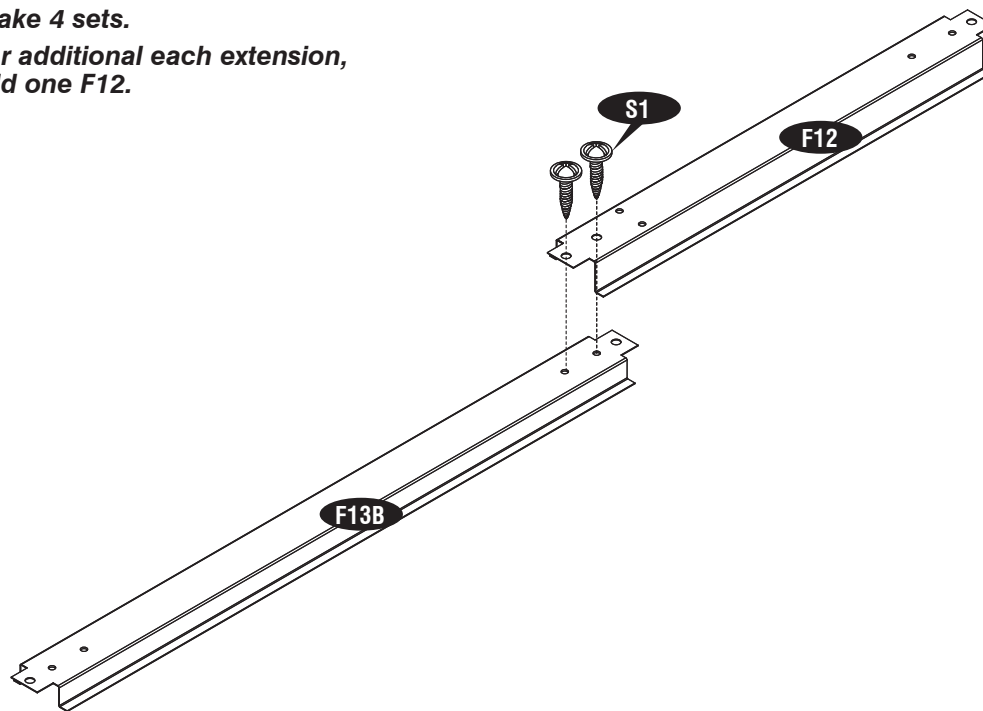Note**Make 4 sets.****For additional each extension, add one F12.**

5



S1 (x2)

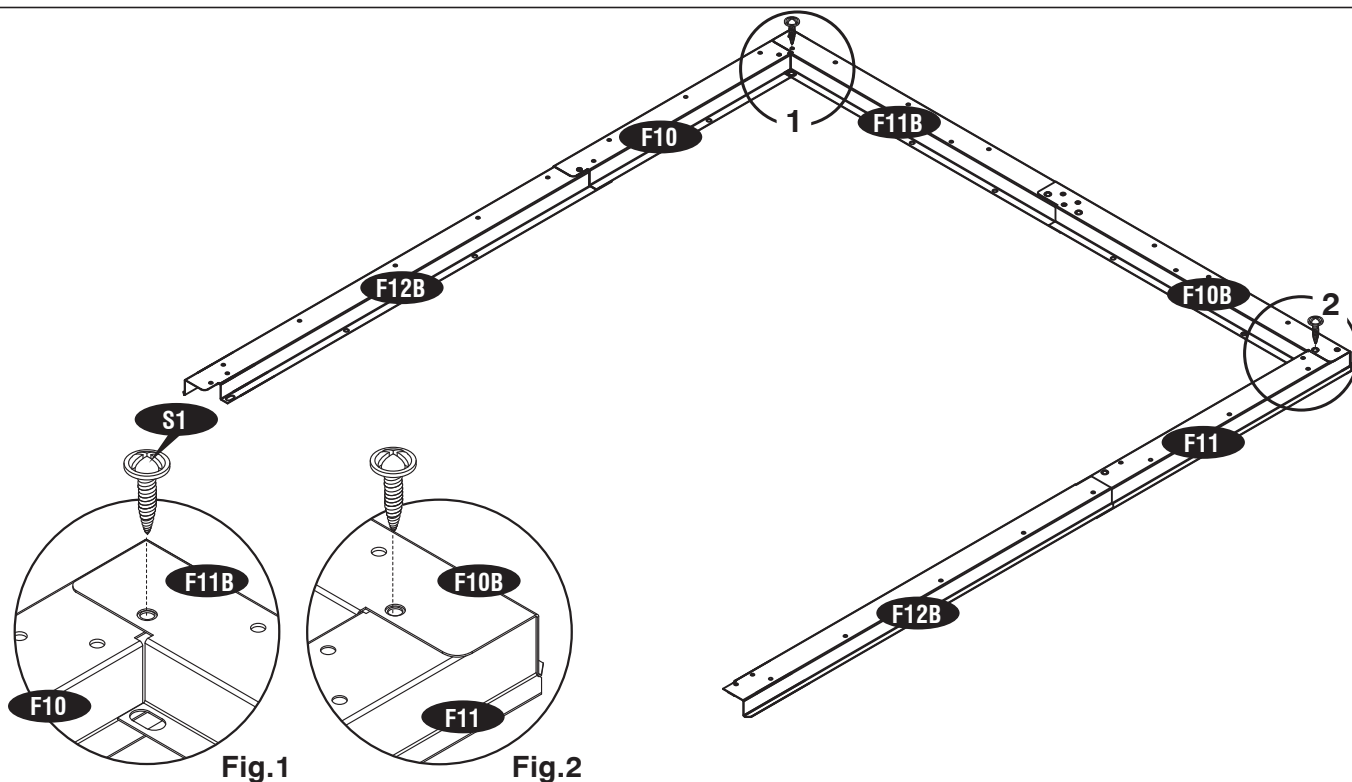



Fig.1

Fig.2

6




S1 (x2)

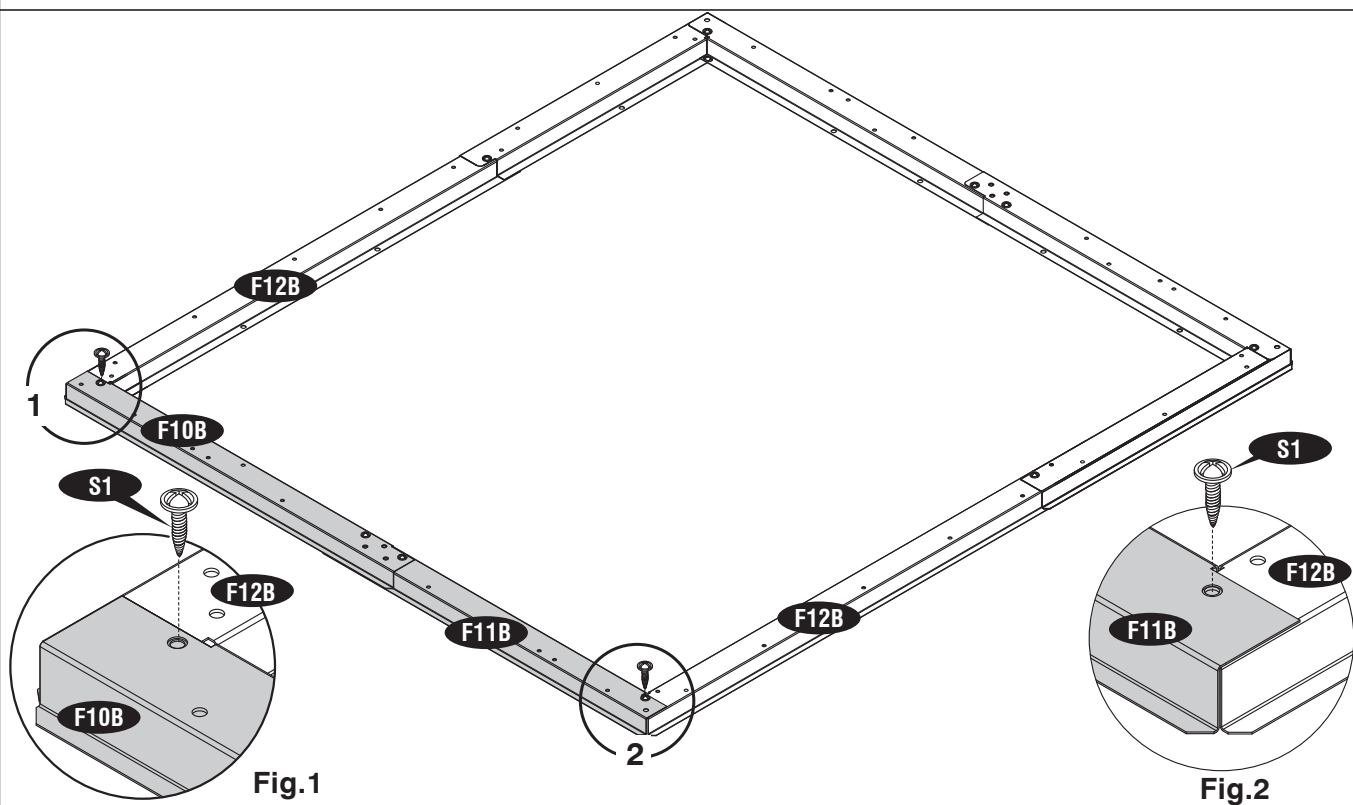

7




S1 (x6)

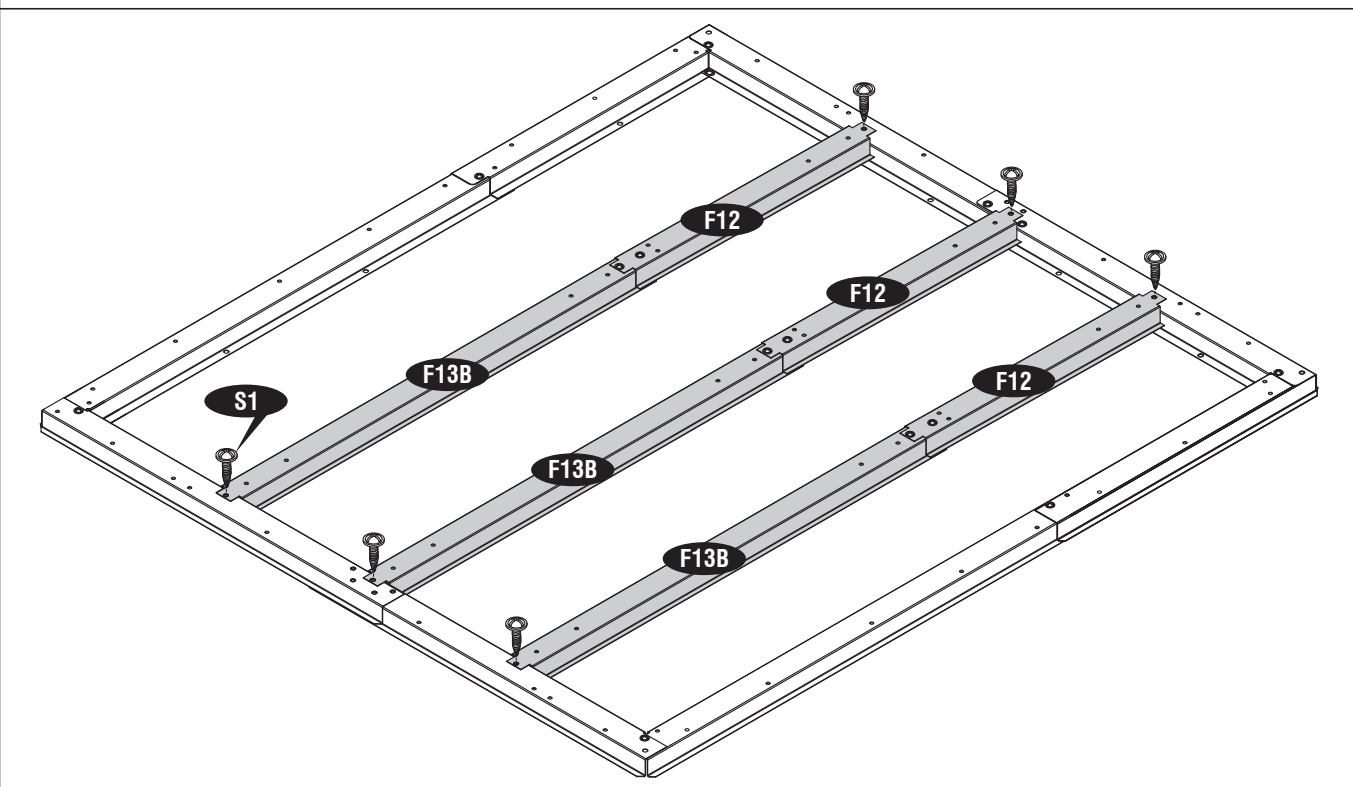

8


F14 (x4)




S1 (x8)

Note

For additional each extension,
add four F14.

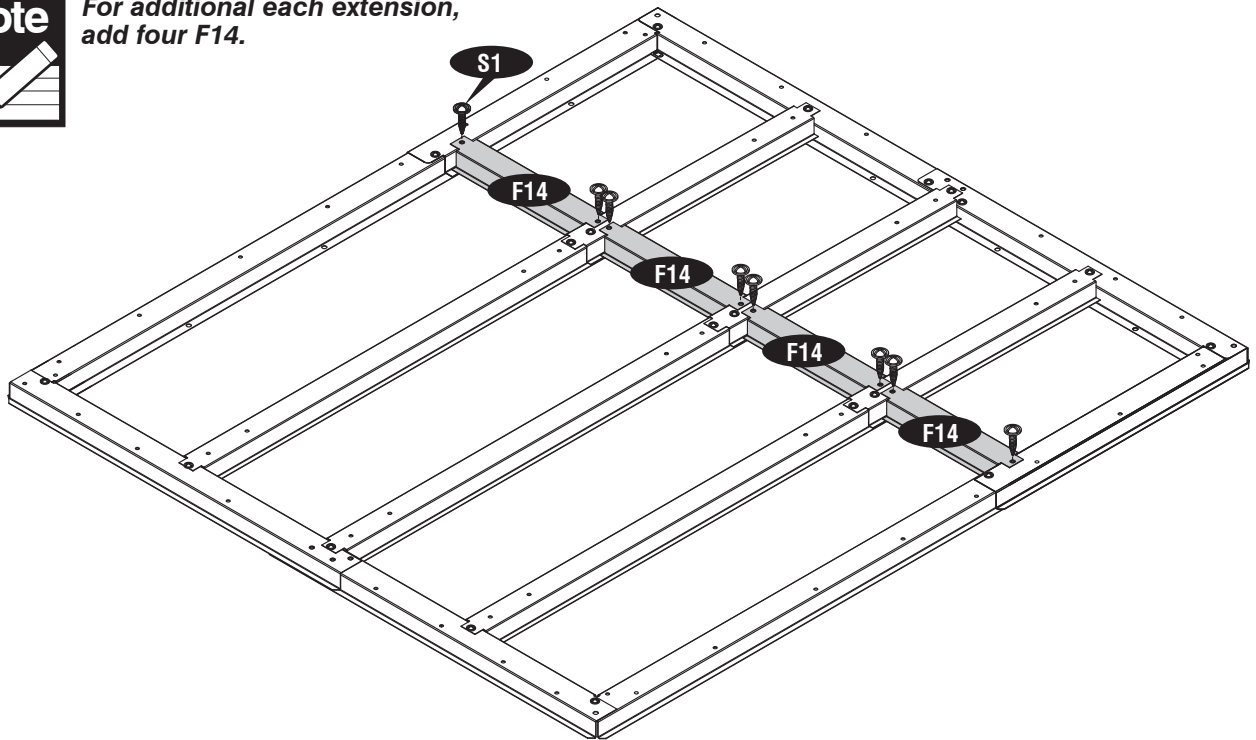

9

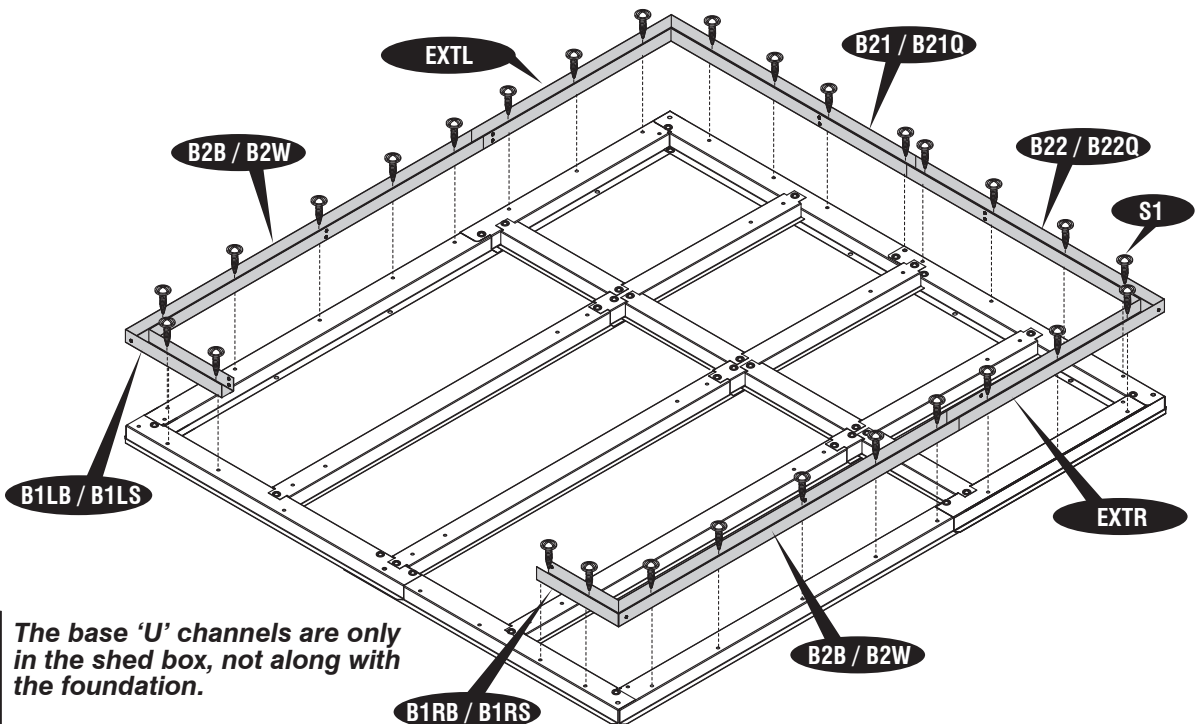**Note**

The base 'U' channels are only
in the shed box, not along with
the foundation.

10



10

Assembly on concrete floor - Optional

Parts needed (not included) :

DESCRIPTION	QTY
Dia. 4.2 x 32mm. (5/32" x 1 1/4")	
Self tapping screw	18
Dia 6 mm Wall plug	18


After completing the assembly of shed, mark the holes on concrete through the foundation frame and using Dia. 6mm. drill bit to make the holes. Secure with **Dia 6mm wall plug and Dia 4.2 x 32 mm self tapping screw** (26 Nos. not provided). This is optional and should be done for wind area if needed

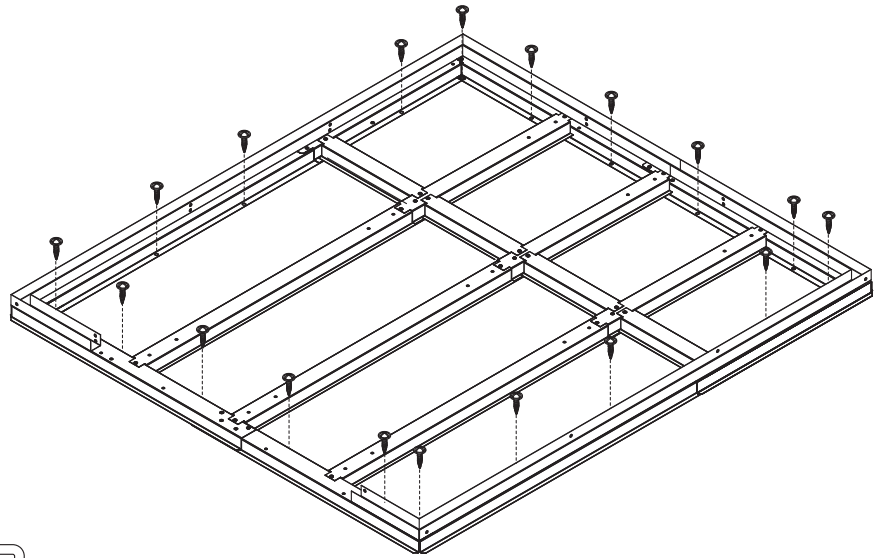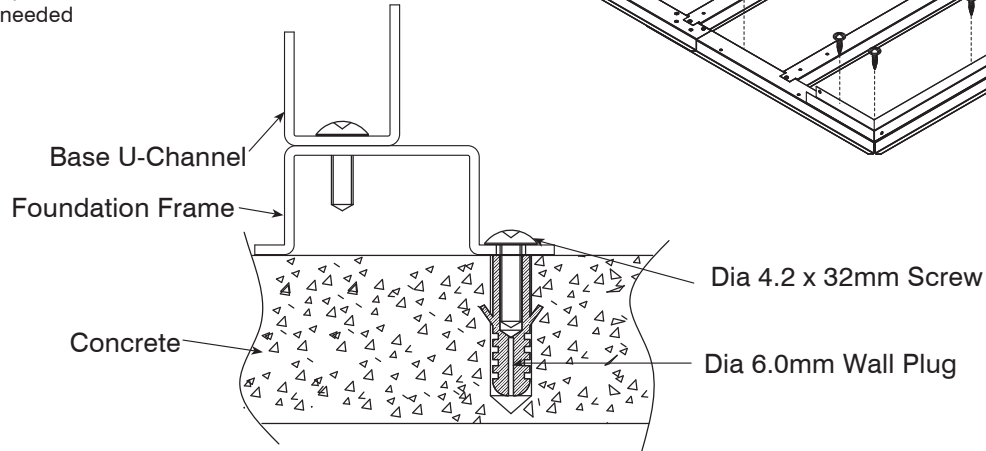

11

Option -1 Plywood (not included)


After completing the assembly of shed place exterior grade CDX 3/4" (19 mm) plywood inside the foundation.

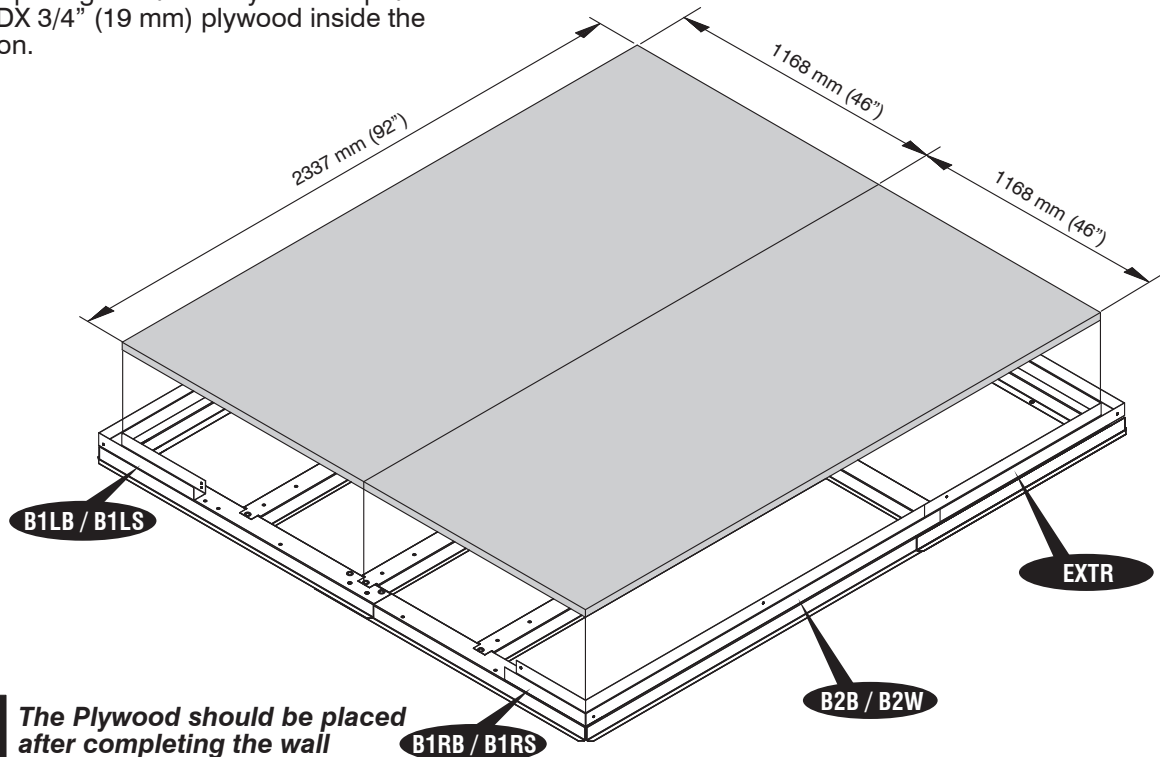

Note


The Plywood should be placed after completing the wall assembly.

After completing the assembly of the base U-Channel fill the concrete up to the foundation top surface.

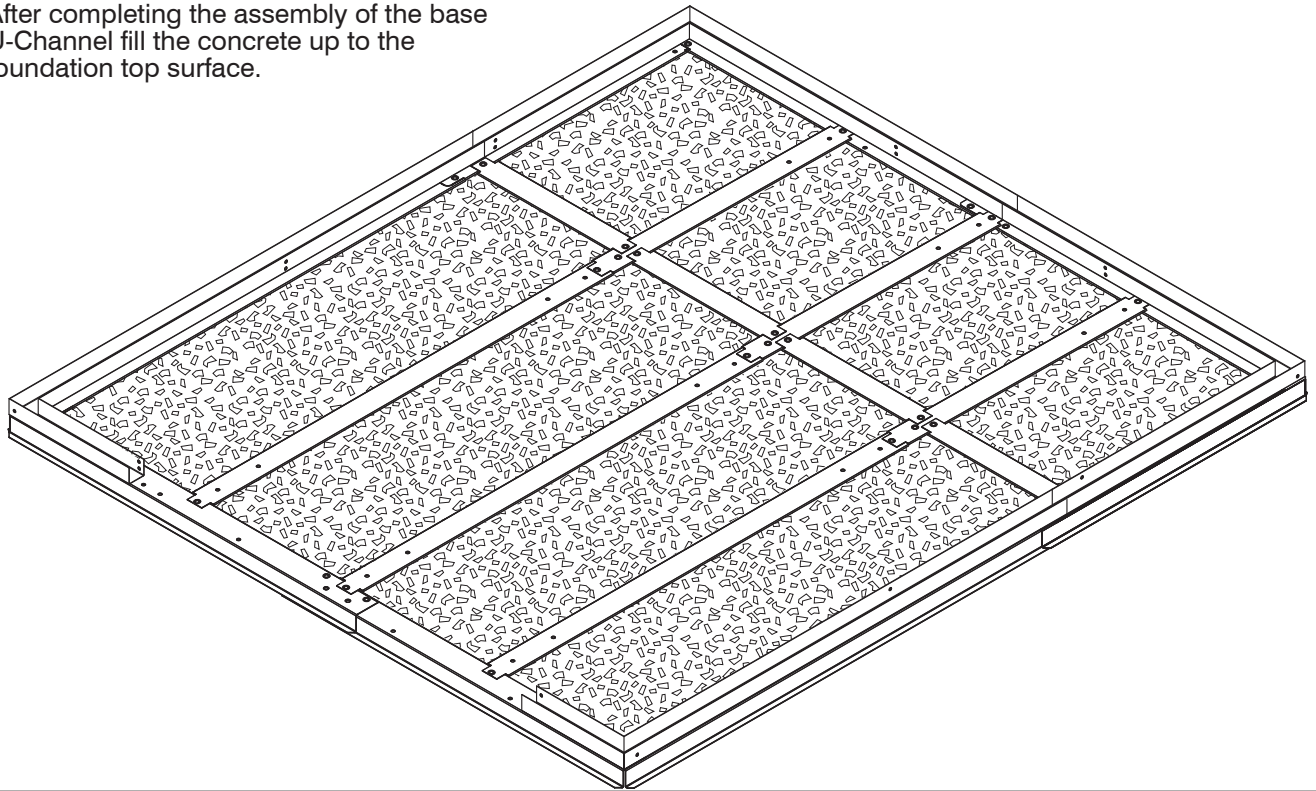

Plywood sizes for each extension

8' x 6' with 2 extension - 8' x 10'

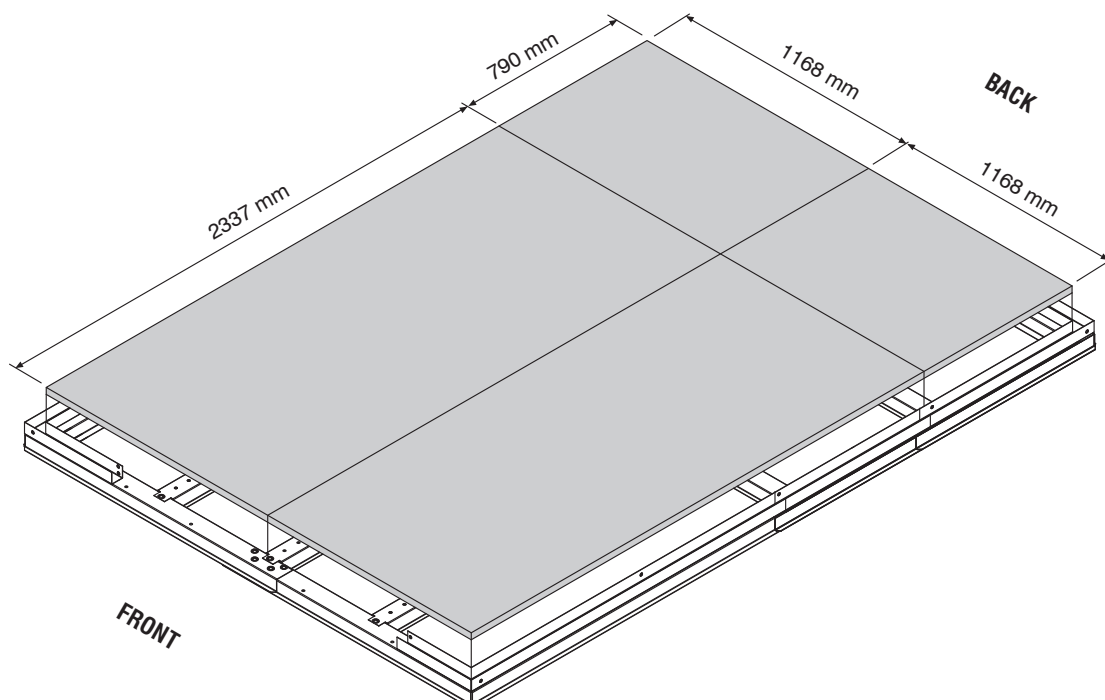



U.S. Polymers, Inc.
1057 S. Vail Ave,
Montebello, CA 90640,
United States of America.